

LVP Series


Protector Modules

Designed for CAT5E, CAT6
Applications

Detent Position Facilitates Testing

Available in 18V, 27V or 65V

UL Listed for Primary and
Secondary Protection

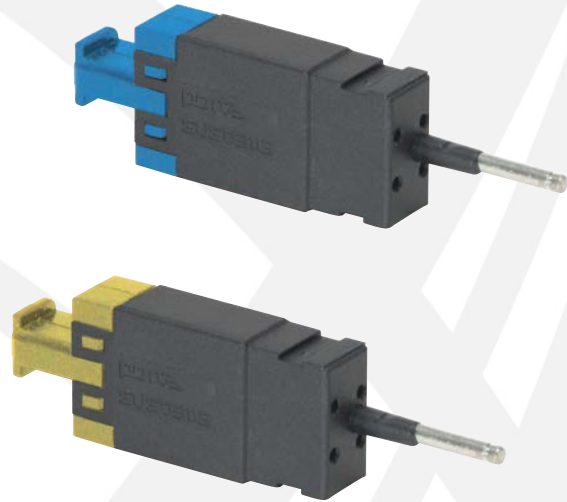

Tii Technologies Inc.

Corporate Headquarters:

141 Rodeo Drive
Edgewood, NY 11717
Phone: 631.789.5000 • Fax: 631.789.5063
Toll Free: 888.844.4720
sales@tiitech.com

Locations:

South March
Long March Industrial Estate
Daventry, Northamptonshire, NN11 4PH, UK
Phone: +44 (0) 1327 301853
Fax: +44 (0) 1327 879532
sales@tiitech.co.uk

Av. José de Escandón y Helguera
No. 21 Ciudad Industrial
Matamoros, Tamaulipas, C.P. 87494, México
Phone: 868.812.8011 • Fax: 868.812.8025
salesmx@tiitech.com.mx


www.tiitech.com

These ultra-low capacitance solid state protector modules provide premium protection for sensitive data communication equipment to frequencies up to 250MHz. Ideal for Power Over Ethernet (POE) circuit protection using the 65 Volt module.

KEY PRODUCT BENEFITS

- ▶ UL 497/497A/497B Listed for Primary, Secondary and Isolated Loop Circuit protection
- ▶ Less than 5 nanoseconds response time
- ▶ Low capacitance solid state technology provides protection for frequencies up to 250 MHz
- ▶ Detent position facilitates testing
- ▶ Reduces service calls and repair costs
- ▶ Designed for CAT5E, CAT6 applications
- ▶ Available in 18V, 27V or 65V

LVP Series

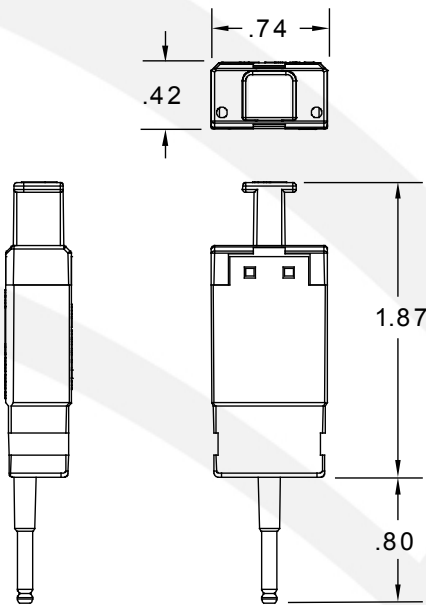

Dimensions are in Inches

ELECTRICAL SPECIFICATIONS

Electrical	18 Volt	27 Volt	65 Volt	Test Parameters
DC Breakdown Voltage	18V	27V	65V	2000V/Sec. max.
Impulse Breakdown Voltage	18V	27V	65V	100V/μSec max
Clamping Time	<5n Sec	<5n Sec	<5n Sec	
Capacitance (Maximum)	<30 pF	<30 pF	<30 pF	1 KHz, 0 VDC
Surge Endurance (Number of Operations is Unlimited)	100A/side	100A/side	100A/side	10/1000μ Sec max
Line Series Resistance	<1 ohm	<1 ohm	<1 ohm	Line in/Line Out
Insulation Resistance (Minimum)	100MΩ	100MΩ	100MΩ	50 VDC 100VDC
Overcurrent Protection	Indefinite 1 hour max 60 sec. max	Indefinite 1 hour max 60 sec. max	Indefinite 1 hour max 60 sec. max	500 mA 1 A 1.5 A

ORDERING INFORMATION

Configuration	Over Current Protection	18 Volt	27 Volt	65 Volt
Single-Pin	Sneak Fuse	LVP18	LVP27	LVP65